

FS40 GUIDE RAIL



- Cutting depth: up to 300mm
- 1,09m long, optional in 2,18m available

For performing straight cuts,
in combination with TR40 and TS40

Technical data

FS40		
Weight rail (2,18m / 1,09m)	kg	7,2 / 3,6
Weight carriage	kg	4,9
Length, extendable as required	m	2,18, optional 1,09
Cutting depth TR40	mm	300
Cutting depth TS40	mm	165

Scope of delivery

- Guide rail 2,18m long
- 2 Fixing brackets
- Sliding carriage cpl.
- **Important note:** The adapter plate must be ordered separately to suit the respective saw.

Advantages

- Quick assembly
- Effortless working
- Relief for the operator
- Tool-free quick-change system
- Can be extended as required.


Application examples

- Cutting concrete, masonry and stone
- Creating door and window openings
- In combination with TR40 and TS40

Accessories

FS40470C	Adaptor plate für TS40
FS40472C	Adaptor plate für TR40
FS4050	Rail connector
FS40402	Guide rail 2,18m long
FS40404	Guide rail 1,09m long
FS4046	Fixing bracket

Details

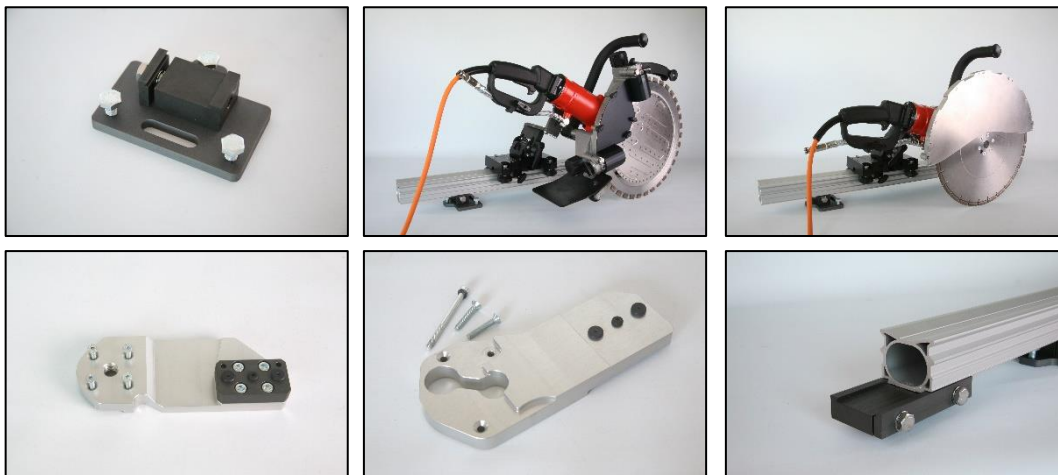

WEKA Elektrowerkzeuge KG

Auf der Höhe 20
75387 Neubulach

Kontakt

Telefon: +49 7053 96816-0
Email: weka@weka-elektrowerkzeuge.de